



Intelli-M Integrated

Pure IT End-To-End Security Solution

Intelli-M Integrated is a seamlessly integrated electronic access control and digital video software security solution. Intelli-M Integrated combines DigitalSENTRY Network Video (DS NVs) and Intelli-M access control software on a single server. Integrating the full feature suite of DigitalSENTRY with Intelli-M Supervisor Plus provides users unmatched scalability in an open architecture software configuration.

Intelli-M Integrated combines a PoE network door controller, switch and IP cameras creating the industry's first pure IT end-to-end security solution.




Features	Benefits
<ul style="list-style-type: none"> ◆ Open Architecture 	<ul style="list-style-type: none"> ◆ Software-only configuration allows users to choose their preferred PC platform (see minimum system requirements).
<ul style="list-style-type: none"> ◆ Power over Ethernet (PoE) 	<ul style="list-style-type: none"> ◆ Intelli-M eIDC (Integrated Door Controller) provides power and data to door peripherals over a single CAT 5/6 cable.
<ul style="list-style-type: none"> ◆ Cost-Effective 	<ul style="list-style-type: none"> ◆ Multi-dimensional access control solution that is easy to use and even easier to install. The eIDC removes costly road blocks typically associated with an installation including labor, materials, and time. The eIDC delivers a commercial solution at half the cost of traditional systems.
<ul style="list-style-type: none"> ◆ Supports IP video devices 	<ul style="list-style-type: none"> ◆ Users have the freedom to choose any IP device for their specific application. Standard IP converters bridge the analog-to-digital gap, utilizing analog camera infrastructures.
<ul style="list-style-type: none"> ◆ Scalable 	<ul style="list-style-type: none"> ◆ Easily upgrade existing systems from a single network door and IP camera to hundreds of doors and cameras.

Intelli-M Integrated

Configuration

Pure IT PoE Integrated Solution

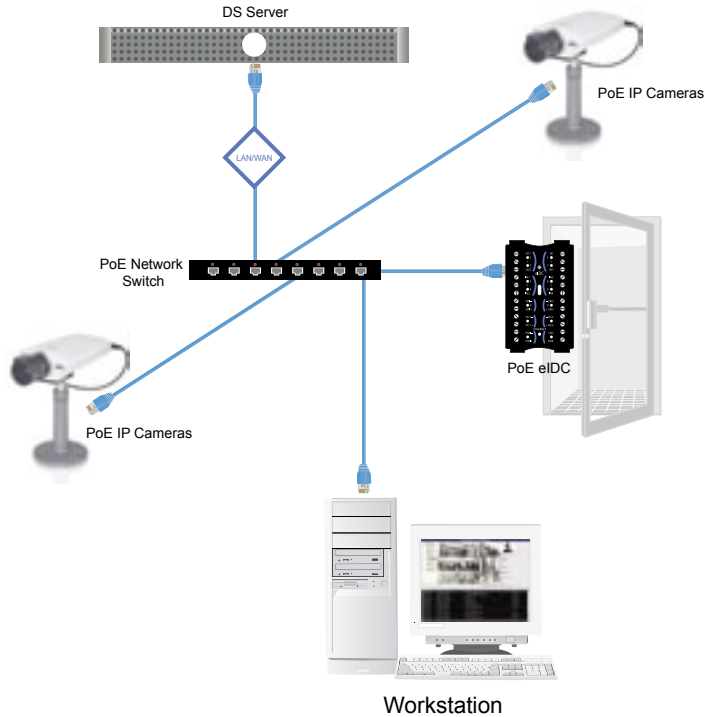

Intelli-M Integrated is a software only configuration installed on a server PC provided by the user. Intelli-M Integrated supports up to 64 IP cameras and up to 128 Intelli-M PoE network door controllers per server PC. Intelli-M Integrated must be installed on a PC that meets the following minimum requirements.

32-64 Channel Configuration

- ◆ Industry-standard, Intel Platform, Server-Grade Motherboard
- ◆ Dual Xeon Processors
- ◆ 1GB RAM
- ◆ Dual Gigabit NICs
- ◆ Microsoft Windows XP Pro, Windows Server 2003 Operating System (Service Pack 4)
- ◆ 7200rpm Hard Drive (minimum of one); can be SCSI or SATA
- ◆ Drive Controller Card
- ◆ CD-RW
- ◆ If stand-alone Intelli-M Integrated configuration, require 20GB partition for OS / Application
- ◆ If Intelli-M Integrated is part of distributed system, requires a minimum of a 160GB drive (20GB partition for OS / Application and 140GB for video storage).

4 and 16 Channel Configurations

- ◆ Industry-standard, Intel Platform Motherboard
- ◆ Intel P4 3.2Ghz Processor
- ◆ 1GB RAM
- ◆ Dual Gigabit NICs
- ◆ Microsoft Windows XP Pro, Windows Server 2003 Operating System (Service Pack 4)
- ◆ 7200rpm Hard Drive (minimum of one); can be SCSI or SATA
- ◆ Drive Controller Card
- ◆ CD-RW
- ◆ If stand-alone Intelli-M Integrated configuration, require 20GB partition for OS / application
- ◆ If Intelli-M Integrated is part of distributed system, requires a minimum of a 160GB drive (20GB partition for OS / Application and 140GB for video storage).

Integral-certified platforms:

- ◆ **IBM E-server:** x Series 346 (model 884031U) (SCSI Drives, Robust SCSI Controller)
- ◆ **Dell PowerEdge:** SC 1425 (SATA Drives, Standard Drive Controller on Motherboard)
- ◆ **Hewlett Packard Proliant Server:** Models DL380 and DL360

Product specifications and availability subject to change without notice. Certain product names mentioned herein may be trade names and/or registered trademarks of other companies. Intelli-M Integrated, DS NVs, Supervisor Plus, and eIDC are registered trademarks of Integral Technologies, Inc.